


BB-600 series


Optimum Cleaning Technology at your finger tips



dual nozzle 

aerated gentle wash 


ultra sonic soldering water-proof seat 

intelligent occupied seat sensor 

quick release 

Kids 

Functions

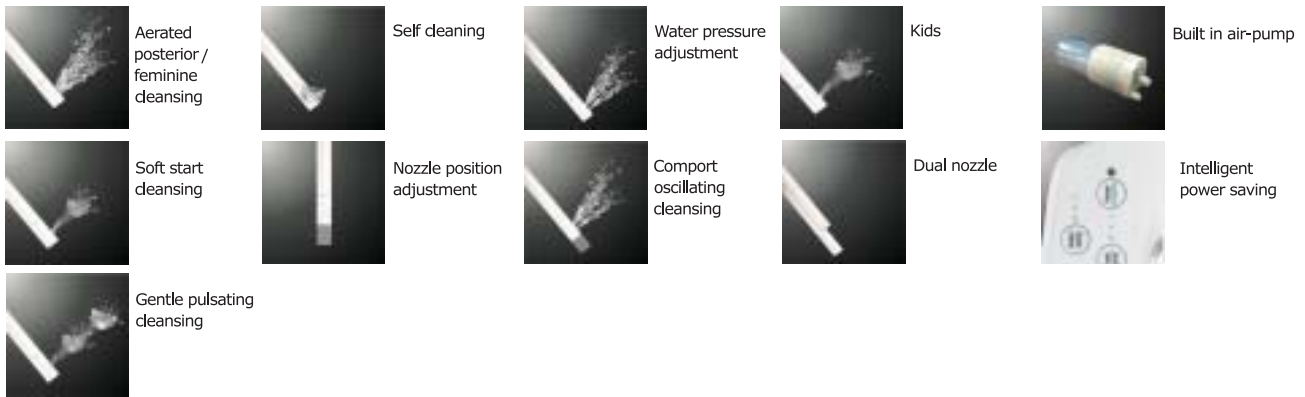

Features



Specifications ISO 9001

BB-600 Elongated & Round front model

Power rating	120V, 50~60Hz, 660W
Power cord	1.2m
Cleansing features	Posterior wash : 850 ± 150 ml / min Feminine wash : 950 ± 150 ml / min Tank capacity : 800ml Water temperature : Room temp ~ 104°F (40°C) Heater capacity : 600W Safety features : Thermal cut-off, Thermostat(bi-metal), Floating sw
Dry features	Air temperature : Room temp ~ 140°F (60°C) Heater capacity : 250W Safety features : Bi-metal, Thermal cut-off
Heated seat features	Seat temperature : Room temp ~ 104°F (40°C) Heater capacity : 55W Safety feature : Thermal cut-off
Air purify features	Catalytic filter
Water supply pressure	11~107psi (0.08~0.74MPa)
Circuit breaker	Within 15mA 0.03 sec
Net weight	10.3lb (4.7kg)

* Specifications can be changed without notice.
* Recommended water supply pressure is between 14psi ~ 100psi(0.09mPa ~ 0.68mPa).

Dimension

